


LIGHT ADAPTER

Wide Range, Professional Accuracy, Better Performance



MODEL: LX-02

SPECIFICATIONS	
Range	Range 1 – 0 to 2,000 LUX. Range 2 – 2,000 to 20,000 LUX. Range 3 – 20,000 to 50,000 LUX.
Output	Range 1 – 0.1 mV per LUX. Range 2 – 0.1 mV per 10 LUX. Range 3 – 0.1 mV per 100 LUX.
Accuracy	± (5% + 0.1 mV).
Sensor	Exclusive photo diode & correction filter, spectrum meet C.I.E.
Battery	006P DC 9V battery.
Power Consumption	Approx. DC 6 mA.
Power Failure	Build in low battery indicator.
Operating Temp.	0° to 50°C (32° to 122°F).
Operating Humidity	Less than 90% RH.
Dimension	100×50×25mm (3.9×1.9×1.0 inch).
Weight	150 g/ 0.33 lb (including battery)
Accessories Included	Light sensor..... 1 pc. Instruction manual..... 1 pc.
Application	To match DMM be used as a precision LUX meter or to connect with analyzer, recorder, tape recorder, controller.

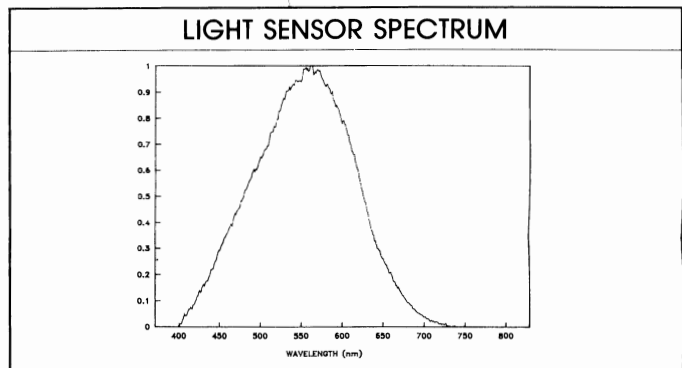

* Appearance and specifications listed in this brochure are to change without notice.